

No. 11-506
Revised April, 1996

Eaton®
Directional Control Valves



**Model 30540, 15 GPM
Directional Control Valves**

We Manufacture

Solutions

Hydraulics

S
C
h
y
d
r
a
u
n
i
c
s

Features and Specifications

Eaton 15 GPM Directional Control Valves

Model 30540 with Relief Valve

Standard Features

- Cast Iron Bodies
- Cored Internal Passages
- Adjustable Pin Type Relief Valve, Factory Set at 2000 PSI [138 bar]
- Open Center Circuit Design
- Precision Ground Induction Hardened Spools with Chrome Plating on Exposed Ends
- 4-Way, 3 Position Spools, Spring Centered to Neutral
- 7/8-14 SAE Inlet and Return Ports
- 3/4-16 SAE Work Ports– (Accept 16097 and 16166 orifice plates–see Cat. 11-502)
- Body Bored for Pressure Beyond and Plugged


Specifications

- Inlet Flow Rate ----- 15 GPM [56.8 L/min.]
- Rated Inlet Pressure ----- 2500 PSI [172 bar]
- Rated Workport Pressure ----- 3000 PSI [207 bar]
- Standard Relief Valve Pressure Setting ----- 2000 PSI [138 bar]
- Maximum Work Port Leakage at 1100 PSI [76 bar] ----- 2.5 in³/min. [41 ml/min.]
- Maximum System Temperature ----- 225° F [107° C]

Standard Catalog Assemblies

Single Spool	Two Spool	Three Spool
30541-DSA	30542-DSA	30543-DSA


Dimensions

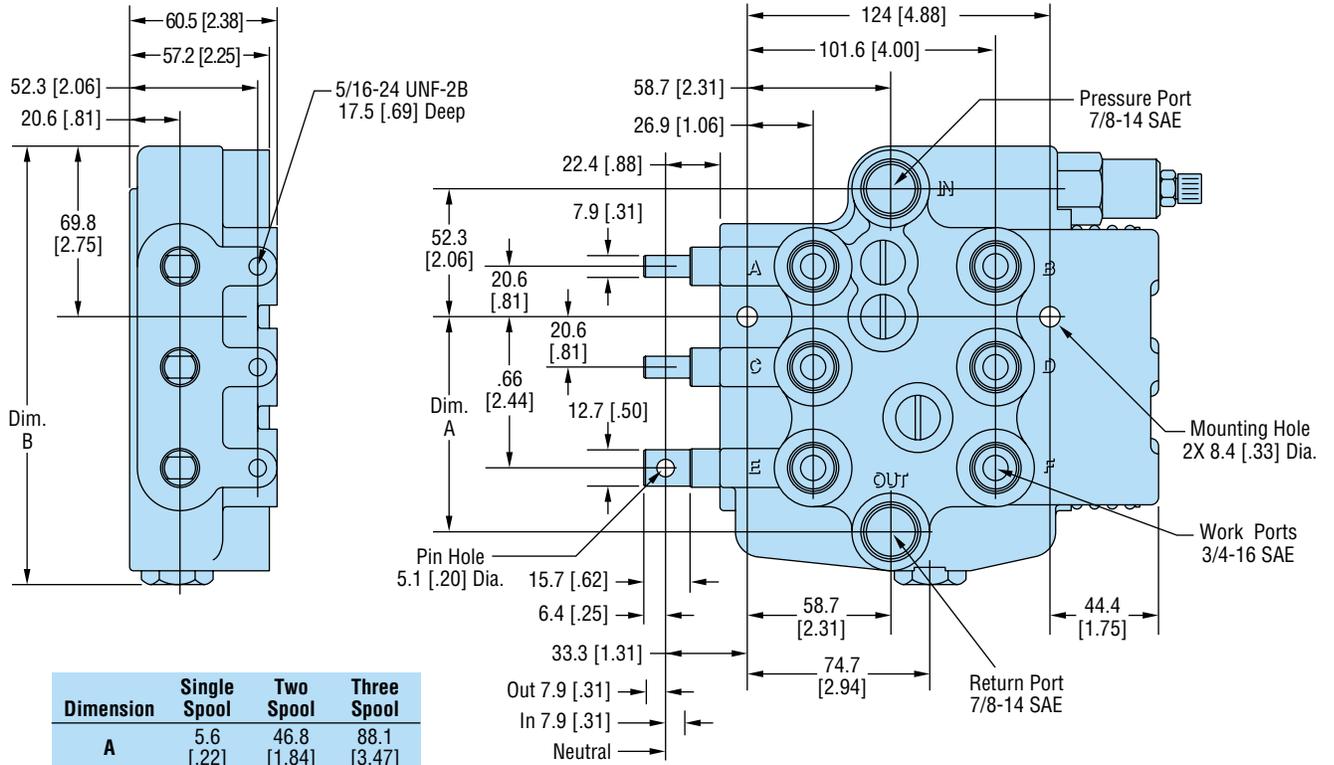


Dimension	Single Spool	Two Spool	Three Spool
A	5.6 [.22]	46.8 [1.84]	88.1 [3.47]
B	96.8 [3.81]	138.2 [5.44]	179.3 [7.06]

All dimensions in mm [in.]

Optional Handle

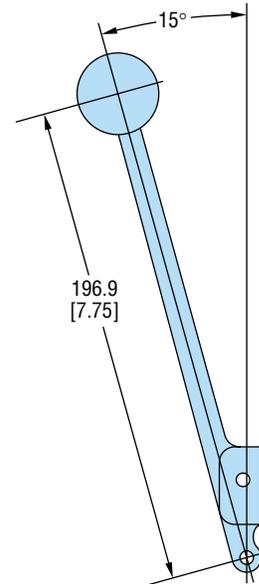


Schematics

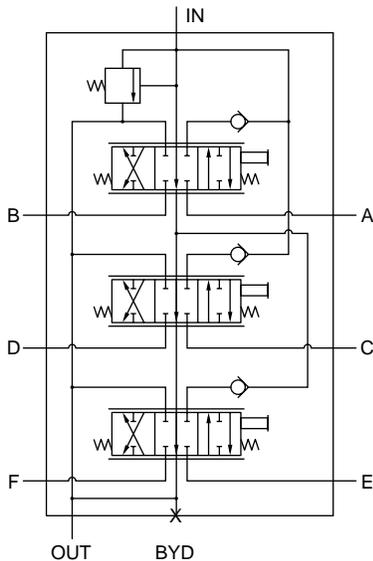

Unit Weights

30541	3.2 [7.0]
30542	5.4 [12.0]
30543	7.7 [17.0]

Weights in kilograms [pounds]

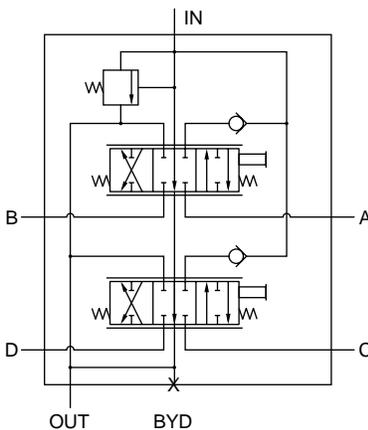

Note: Spool 3 is in tandem with spools 1 and 2; this allows metering to spools 1 and 2 with all excess flow to spool 3.

Options and Performance


Kit	Order Number
Handle Kit	30540-904
(order one kit for each spool)	
Pressure Beyond Plug 3/4-16 SAE	30501-74
Closed Center Plug	30501-96
Detent Kits	
Detent Out	30540-911
Detent In	30540-912
Detent In and Out	30540-913
Relief Valve Springs (Adjustment Ranges)	
1000 - 1500 PSI [69 - 103 bar]	17060-37
1450 - 2000 PSI [100 - 138 bar]	17060-38
1950 - 2300 PSI [134 - 159 bar] (Std)	17060-39
2250 - 2500 PSI [155 - 172 bar]	17060-40
If no relief valve is required, order plug	15655-10
Seal Repair Kits	
One Spool	30501-918
Two Spool	30502-934
Three Spool	30540-902

Optional Spool Configurations


(all spools spring centered to neutral)

- 3 - way, 3 position
(ports "B," "D," and "F" used for 3 - way work ports)
- 3 - way, 3 position, detented "in" float
(available in spool A and C only)
(ports "B," "D," and "F" used for 3 - way work ports)
- 4 - way, 3 position
- 4 - way, 3 position, detented "in"
- 4 - way, 3 position, detented "out"
- 4 - way, 3 position, detented "in" and "out"
- 4 - way, 4 position, detented "in" float
(available in spool A and C only)
- 4 - way, 3 position, motor spool
(lift check removed)
- 4 - way, 3 position, motor spool, detented "in"
(lift check removed)
- 4 - way, 3 position, motor spool, detented "out"
(lift check removed)
- 4 - way, 3 position, motor spool, detented "in" and "out"
(lift check removed)


Neutral Flow Pressure Drop

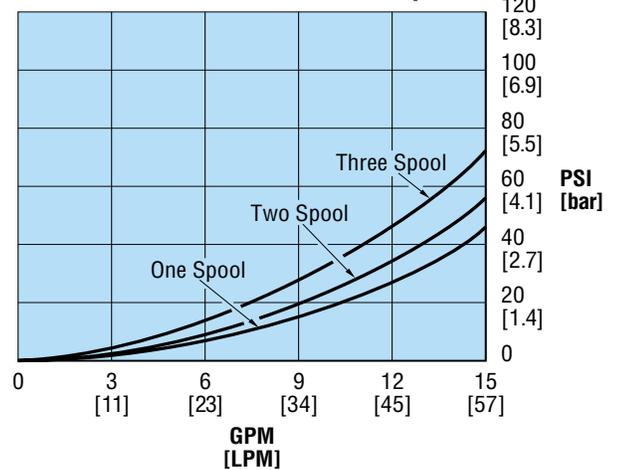

Work Port Pressure Drop Flow: Work Port to Return

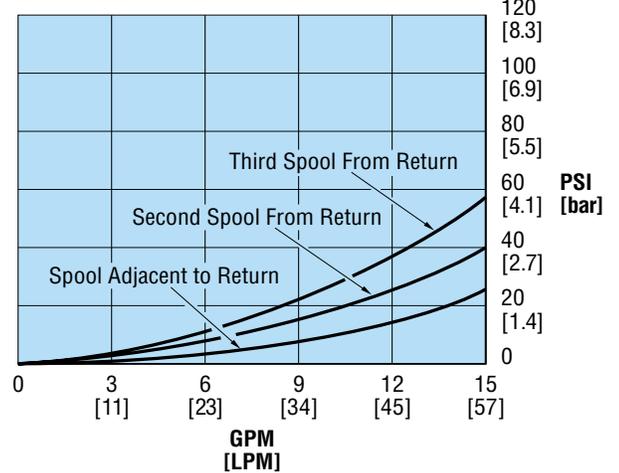


Work Port Pressure Drop Flow: Inlet to Work Port

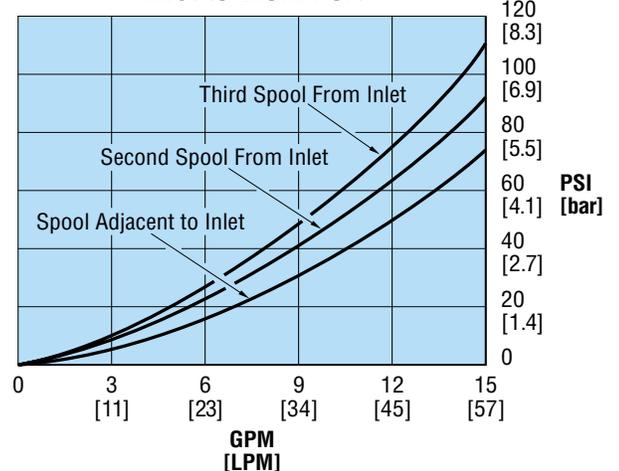

Tests performed with oil viscosity 150 SUS at 100° F [37.7° C] – oil temperature 130° F [54.4° C].

30540 Directional Control Valve Special Order Form

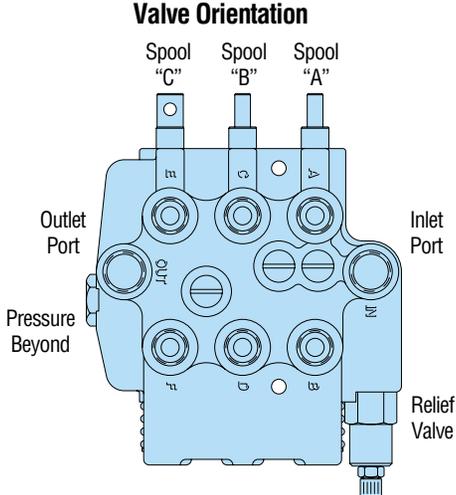Valve Outlet Port Side	Body Plugs	Spool Options	Spool "C"	Spool "B"	Spool "A"	System Relief Valve	Valve Inlet Port Side
Return Port 7/8-14 SAE (Standard)	<input type="checkbox"/> None	3 - way, 3 position (ports "B," "D" and "F" used for 3-way work ports)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> No Relief Valve Plug 15655-10 Inlet GPM _____ Pressure Setting _____ Adjustment Range _____ / _____	Pressure Port 7/8-14 SAE (Standard)
	<input type="checkbox"/> Solid Plug (Standard)	3 - way, 3 position, detented "in" float (ports "B," "D" and "F" used for 3-way work ports)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	<input type="checkbox"/> Pressure Beyond 3/4-16 SAE 30501-74	4 - way, 3 position	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	<input type="checkbox"/> Closed Center 30501-96	4 - way, 3 position, detented "in"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
		4 - way, 3 position, detented "out"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
		4 - way, 3 position, detented "in" and "out"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
Valve Orientation 		4 - way, 4 position, detented "in" float	<input type="checkbox"/>	float N/A	<input type="checkbox"/>	Originator _____	Date _____
		4 - way, 3 position, motor spool	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Application _____	
		4 - way, 3 position, motor spool, detented "in"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Engineer Approval _____	
		4 - way, 3 position, motor spool, detented "out"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Customer _____	
		4 - way, 3 position, motor spool, detented "in" and "out"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Customer Part No. _____	
		Handles (handle kits, 30540-904, are shipped with valves but not assembled on valve)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Eaton Part No. _____	

Notes:

Notes:



Eaton Corporation is a global manufacturer of highly engineered products that serve industrial, vehicle, construction, commercial and semiconductor markets. Principal products include electrical power distribution and control equipment, truck drivetrain systems, engine components, hydraulic products, ion implanters and a wide variety of controls. Headquartered in Cleveland, the company has 49,000 employees and 143 manufacturing sites in 26 countries around the world. Sales for 1997 were \$7.6 billion.

Information contained in this catalog is accurate as of the publication date and is subject to change without notice. Performance values are typical values. Customers are responsible for selecting products for their applications using normal engineering methods.

Eaton Corporation
Hydraulics Division
15151 Highway 5
Eden Prairie, MN 55344
Telephone: 612/937-7254
Fax: 612/937-7130

Eaton Ltd.
Hydraulics Division
Glenrothes, Fife
Scotland, KY7 4NW
Telephone +44 (0) 1592-771-771
Fax: +44 (0) 1592-773-184

Eaton GmbH
Hydraulics Division
Am Schimmersfeld 7
40880 Ratingen, Germany
Telephone: +49 (0) 2102-406-830
Fax: +49 (0) 2102-406-800



Quality System Certified
Products in this catalog are
manufactured in an
ISO-9001-certified site.

www.eatonhydraulics.com

Copyright Eaton Corporation, 1993, 1996
All Rights Reserved
Printed in USA

Form No. 11-506
April, 1996