


**Eaton®**  
Selector Valves

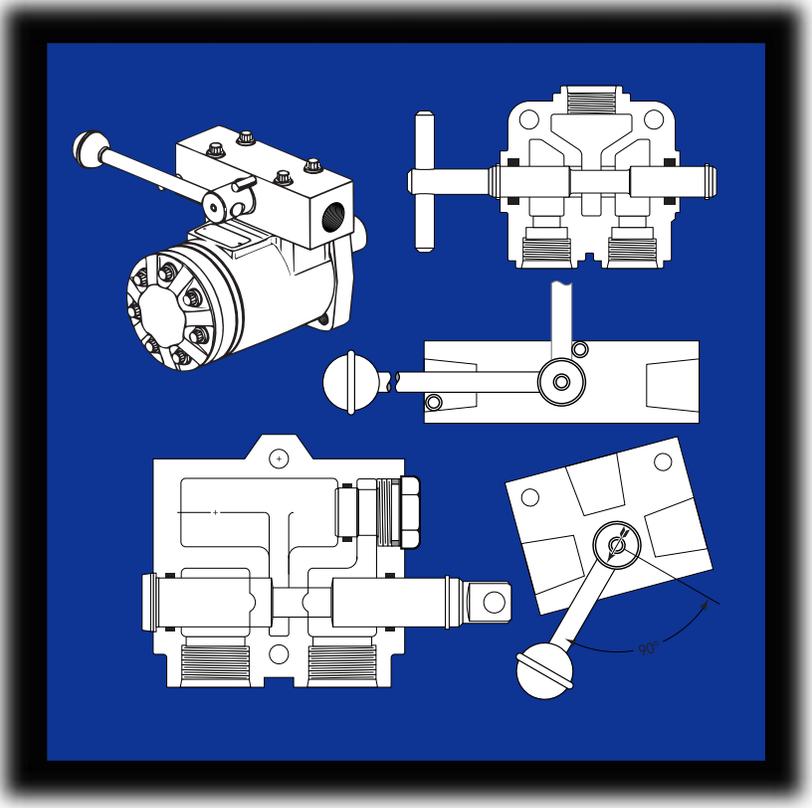

**Manually Operated Selector Valves**

We Manufacture

**Solutions**


**Hydraulics**

S  
C  
h  
y  
i  
d  
r  
a  
u  
n  
i  
c  
s


# Model 15676 30 GPM Selector Valve

## With Optional Inlet Relief Valve

### Dimensions

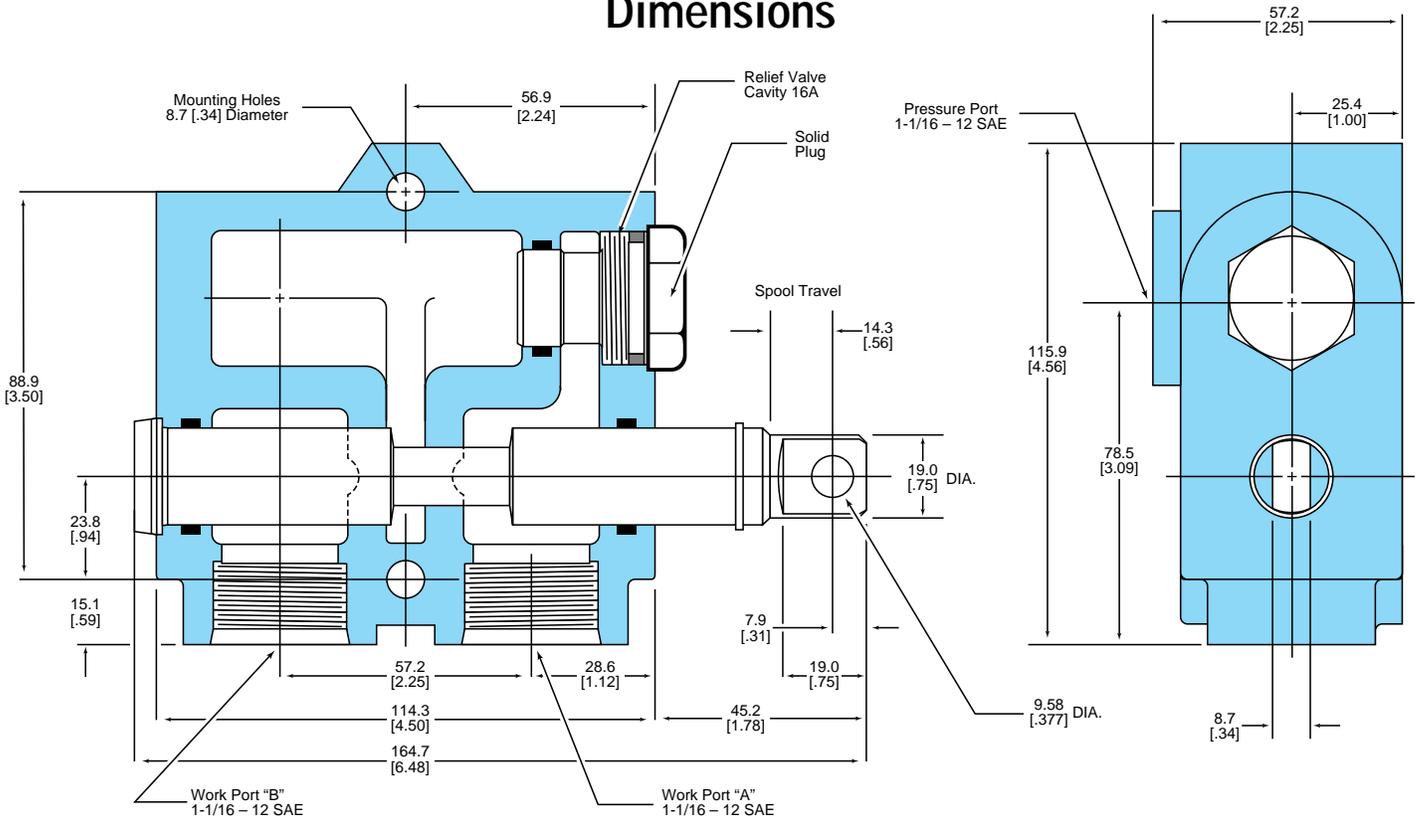

### Schematic

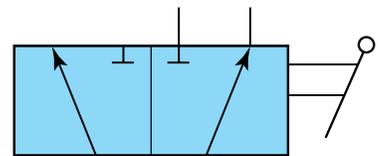

### Specifications

Rated Input Flow	113.6 L/min. [30 GPM]
Rated Pressure	172.4 bar [2500 PSI]
Weight	3.2 kg. [7.0 lbs.]
Paint	Primer


**Note:** When a relief valve is installed in relief valve cavity 16A port "A" must be connected to tank, port "B" is then used as a pressure port to control valve or motor.

### Ordering Information


Order No. 15676-DAA

# Model 39004 20 GPM Selector Valve

## Dimensions

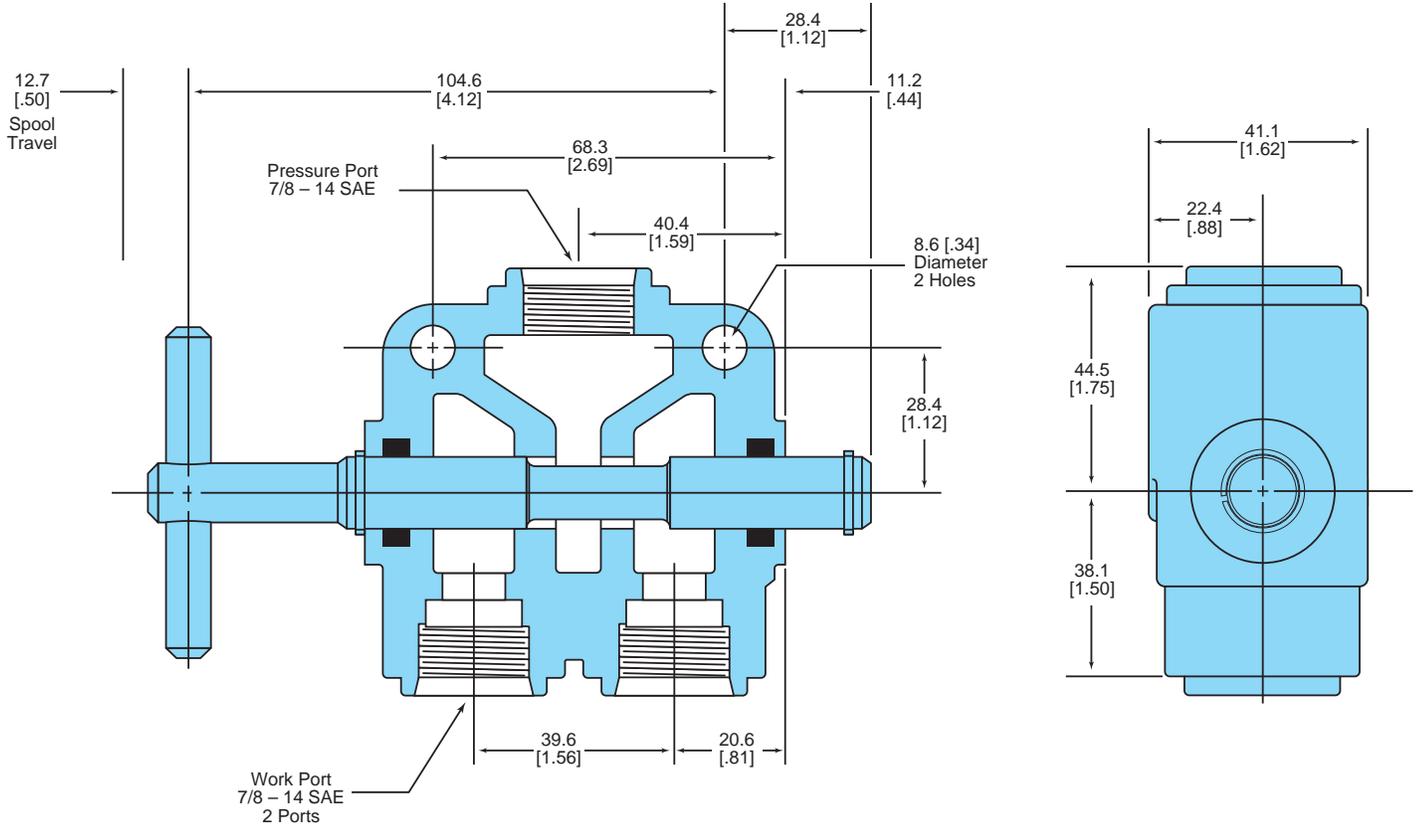

## Schematic

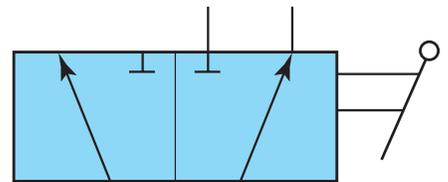

## Specifications

Rated Input Flow	75.7 L/min. [20 GPM]
Rated Pressure	172.4 bar [2500 PSI]
Weight	1.5 kg. [3.25 lbs.]
Paint	Primer

## Ordering Information

Order No. 39004-ABC

# Rotary Selector Valves—3 or 4 Way

Two position, two or three way plug-type selector valves are used to turn motor circuits on and off, for auger and conveyor controls, and for fishing gurdys. Normal operating pressure is 104 bar [1500 PSI] due to forces required to operate the


lever, but valves may be used in any set position to 207 bar [3000 PSI]. They are available with in-line mounting or for manifold mounting on Char-Lynn® H and S Series motors.

## 20 GPM 3 Way In Line Selector




No Relief, Nominal Pressure Rating 207 bar [3000 PSI]

Flow	Product Number	Mounting	Port Size	Shipping Weight
76 l/min 20 GPM	601-1015		1/2 NPTF	3.3 kg 1.5 lbs

### Dimensions

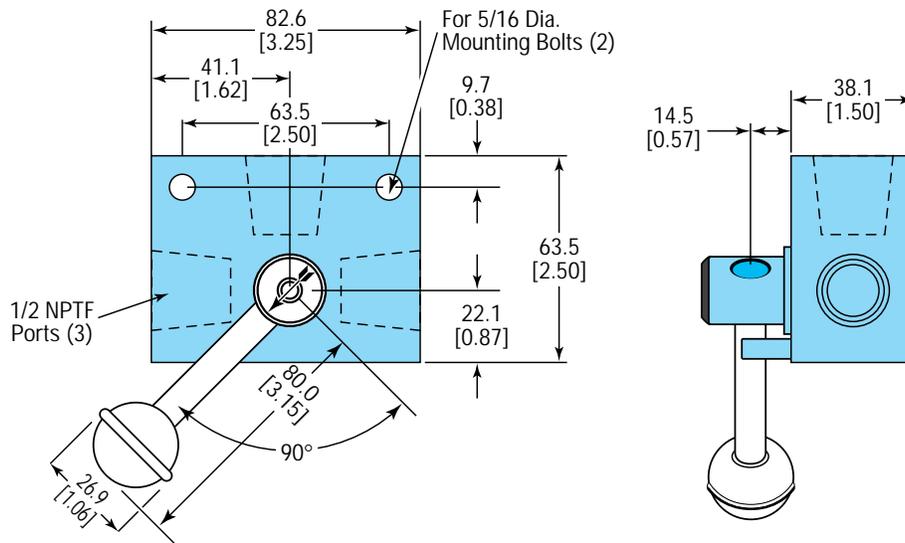

### Schematic

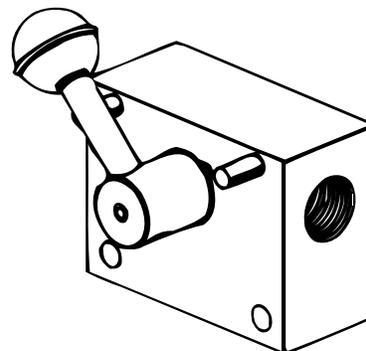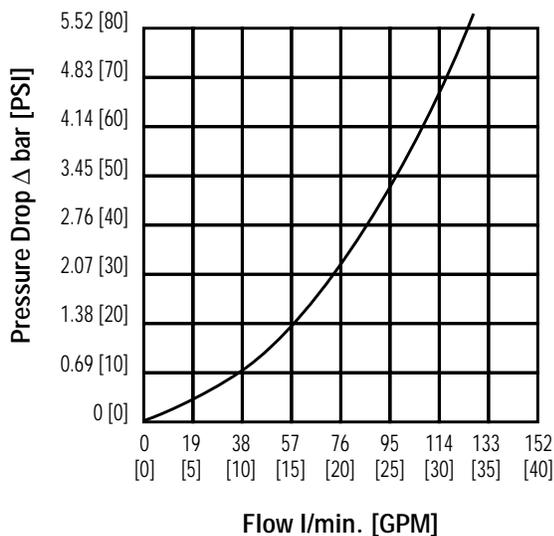




601-1015

# 20 GPM 4 Way Port Mounted Selector

## No Relief, Nominal Pressure Rating 207 bar [3000 PSI]

Flow	Product Number	Mounting	Port Size	Shipping Weight
76 l/min 20 GPM	601-1126	Char-Lynn H&S Series Motor Port Mounting	7/8-14 O-ring	3.3 kg 1.5 lbs

### Dimensions

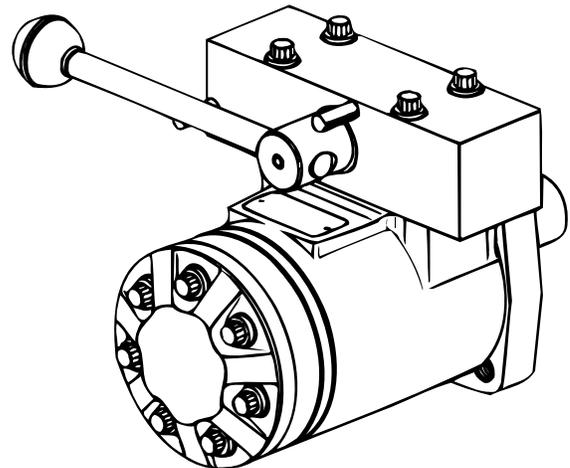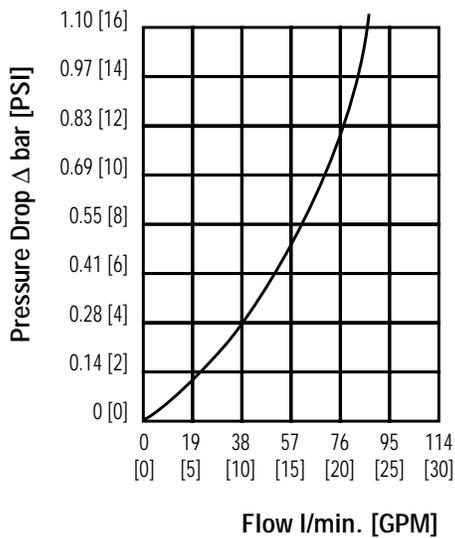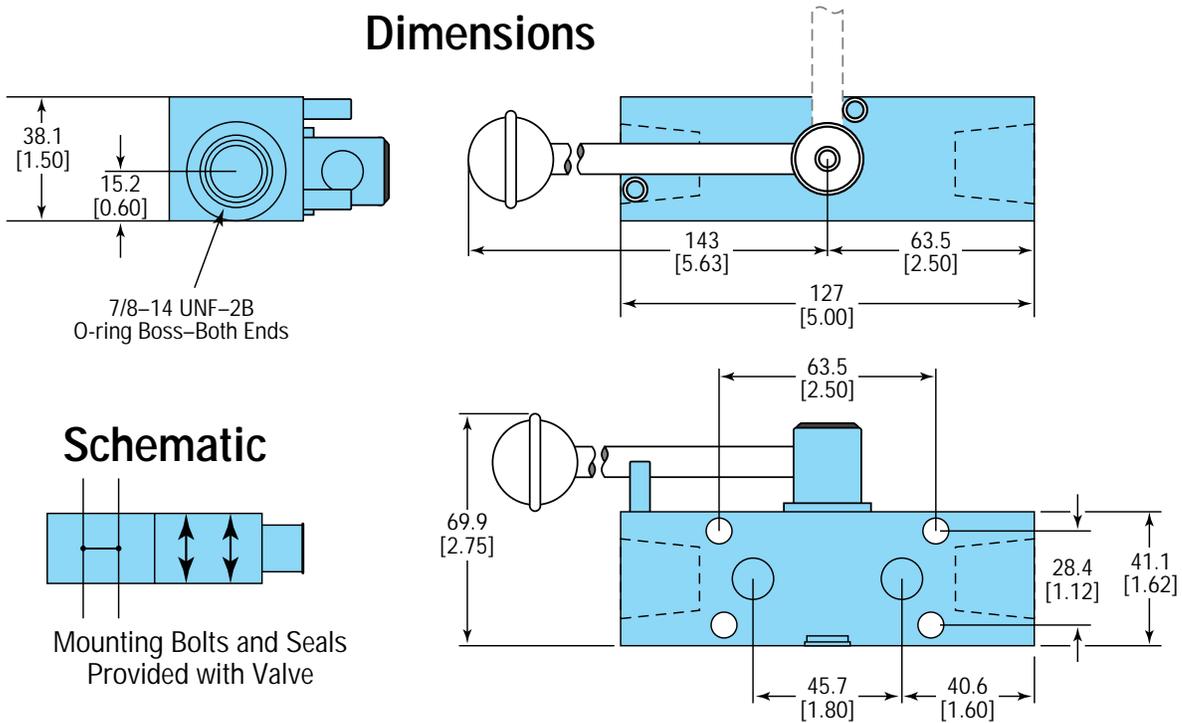

601-1126 (Mounted on Motor)

---

# Notes

# Notes



Eaton Corporation is a global manufacturer of highly engineered products that serve industrial, vehicle, construction, commercial and semiconductor markets. Principal products include electrical power distribution and control equipment, truck drivetrain systems, engine components, hydraulic products, ion implanters and a wide variety of controls. Headquartered in Cleveland, the company has 49,000 employees and 143 manufacturing sites in 26 countries around the world. Sales for 1997 were \$7.6 billion.

Information contained in this catalog is accurate as of the publication date and is subject to change without notice. Performance values are typical values. Customers are responsible for selecting products for their applications using normal engineering methods.

Eaton Corporation  
**Hydraulics Division**  
15151 Highway 5  
Eden Prairie, MN 55344  
Telephone: 612/937-7254  
Fax: 612/937-7130

Eaton Ltd.  
**Hydraulics Division**  
Glenrothes, Fife  
Scotland, KY7 4NW  
Telephone +44 (0) 1592-771-771  
Fax: +44 (0) 1592-773-184

Eaton GmbH  
**Hydraulics Division**  
Am Schimmersfeld 7  
40880 Ratingen, Germany  
Telephone: +49 (0) 2102-406-830  
Fax: +49 (0) 2102-406-800



**Quality System Certified**  
Products in this catalog are  
manufactured in an  
ISO-9001-certified site.

[www.eatonhydraulics.com](http://www.eatonhydraulics.com)

