

Service Bulletin

Eaton® Heavy Duty – Models 33 thru 76 Tapered Shaft Nut Torque Specifications

No. 980901
September 1998
(Replaces No. 980601 June 1998)




Be advised that the shaft nut torque specifications on the Heavy Duty Series Models 33 thru 76 has been increased. Note the new torque values listed below.


To help in the removal of the Yoke we suggest using a Tapered Shaft Yoke Puller Tool, which is described on back of this form.

This Service Bulletin replaces previous versions as we discovered some errors in the dimensions referenced on the Tapered Shaft Yoke Puller Tool. Plus we reduced the required effective thread length size of the 7/8" bolt. We found that 2" effective thread length works fine and this type of bolt is more easily sourced. We apologize for any inconvenience these errors may have caused.

Tapered Shaft Models 33 thru 64 Compatible with ISO 3019/1 (SAE-J744) Specifications

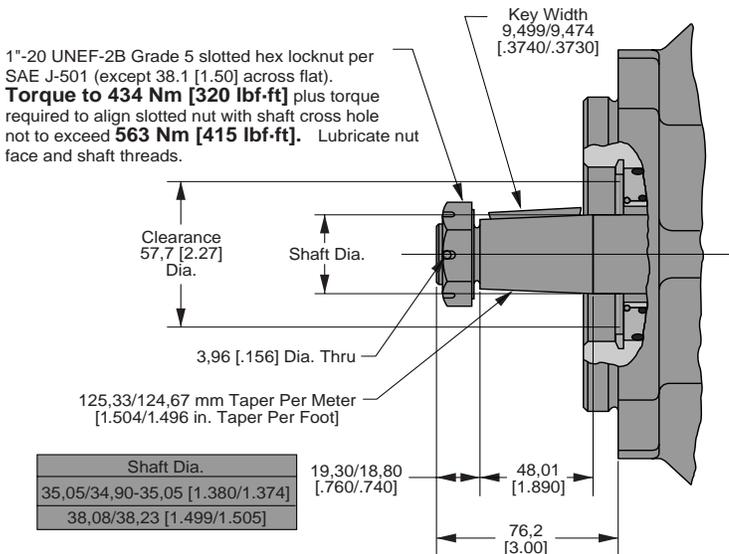

Tapered Shaft Model 76 Compatible with ISO 3019/1 (SAE-J744) Specifications

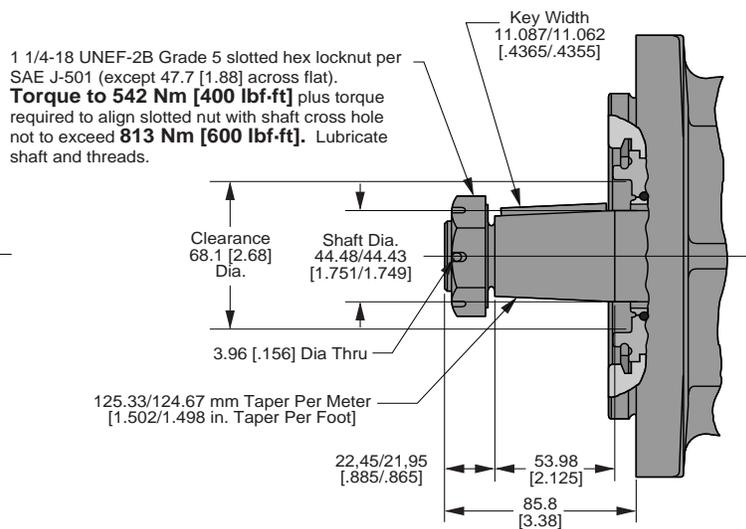


All dimensions given in millimeters [inches].

Heavy Duty Series Tapered Shaft Torque – Specifications


Tapered Shaft Yoke Puller

(for 1310 and 1350 Yokes)

Recommended Dimensions for Fabrication

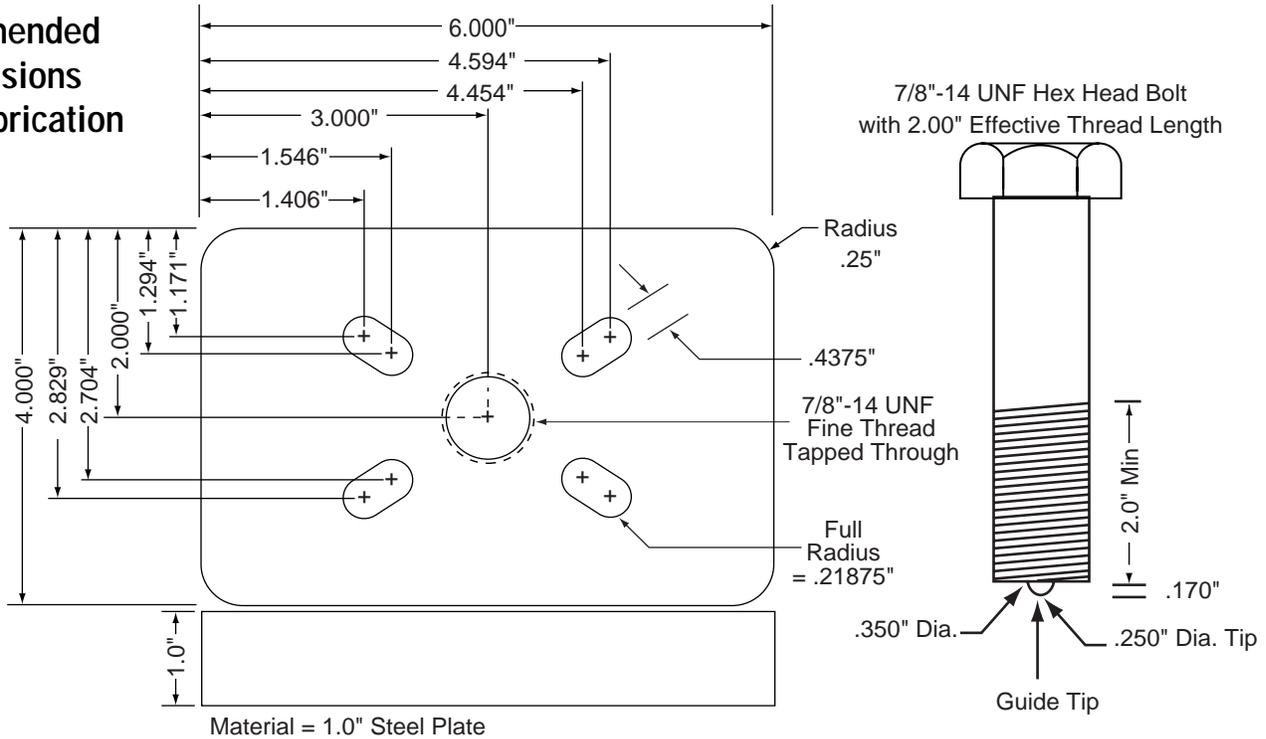


(4) 5/16"-18 x 2.5" Hex Head Bolts, Nuts and Flat Washers

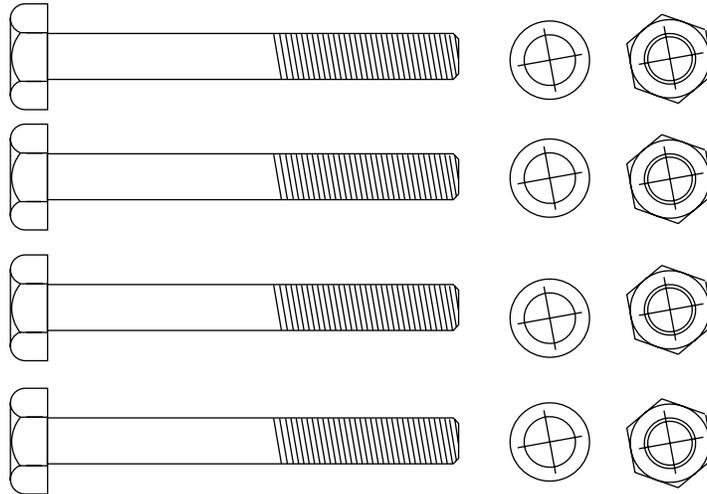

Eaton Corporation
Hydraulics Division
 15151 Hwy. 5
 Eden Prairie, MN 55344
 Telephone: 612/937-9800
 Fax: 612/937-7130

Eaton Ltd.
Hydraulics Division
 Glenrothes, Fife
 Scotland, KY7 4NW
 Telephone: +44 (0)1592-771-771
 Fax: +44 (0)1592-773-184

Eaton GmbH
Hydraulics Products
 Am Schimmersfeld 7
 40880 Ratingen, Germany
 Telephone: +49 (0)2102-406-830
 Fax: +49 (0)2102-406-800



Quality System Certified
 Products in this catalog are manufactured in an ISO-9001-certified site.