


Directional Controls



Smooth Shift Wet Armature Directional Valve

(F3)DG4S4-01*C-W3-BB-50-S410

Model	Spool	Diagram Plate	■ Spool Kit	■ Core Tube Kit
DG4S4-010C	463385	290341	940711	926547
DG4S4-012C	463387	290343	940713	
DG4S4-016C	463389	290345	940715	
DG4S4-018C	463391	290340	940717	926548
DG4S4-0133C	463392	577484	940718	

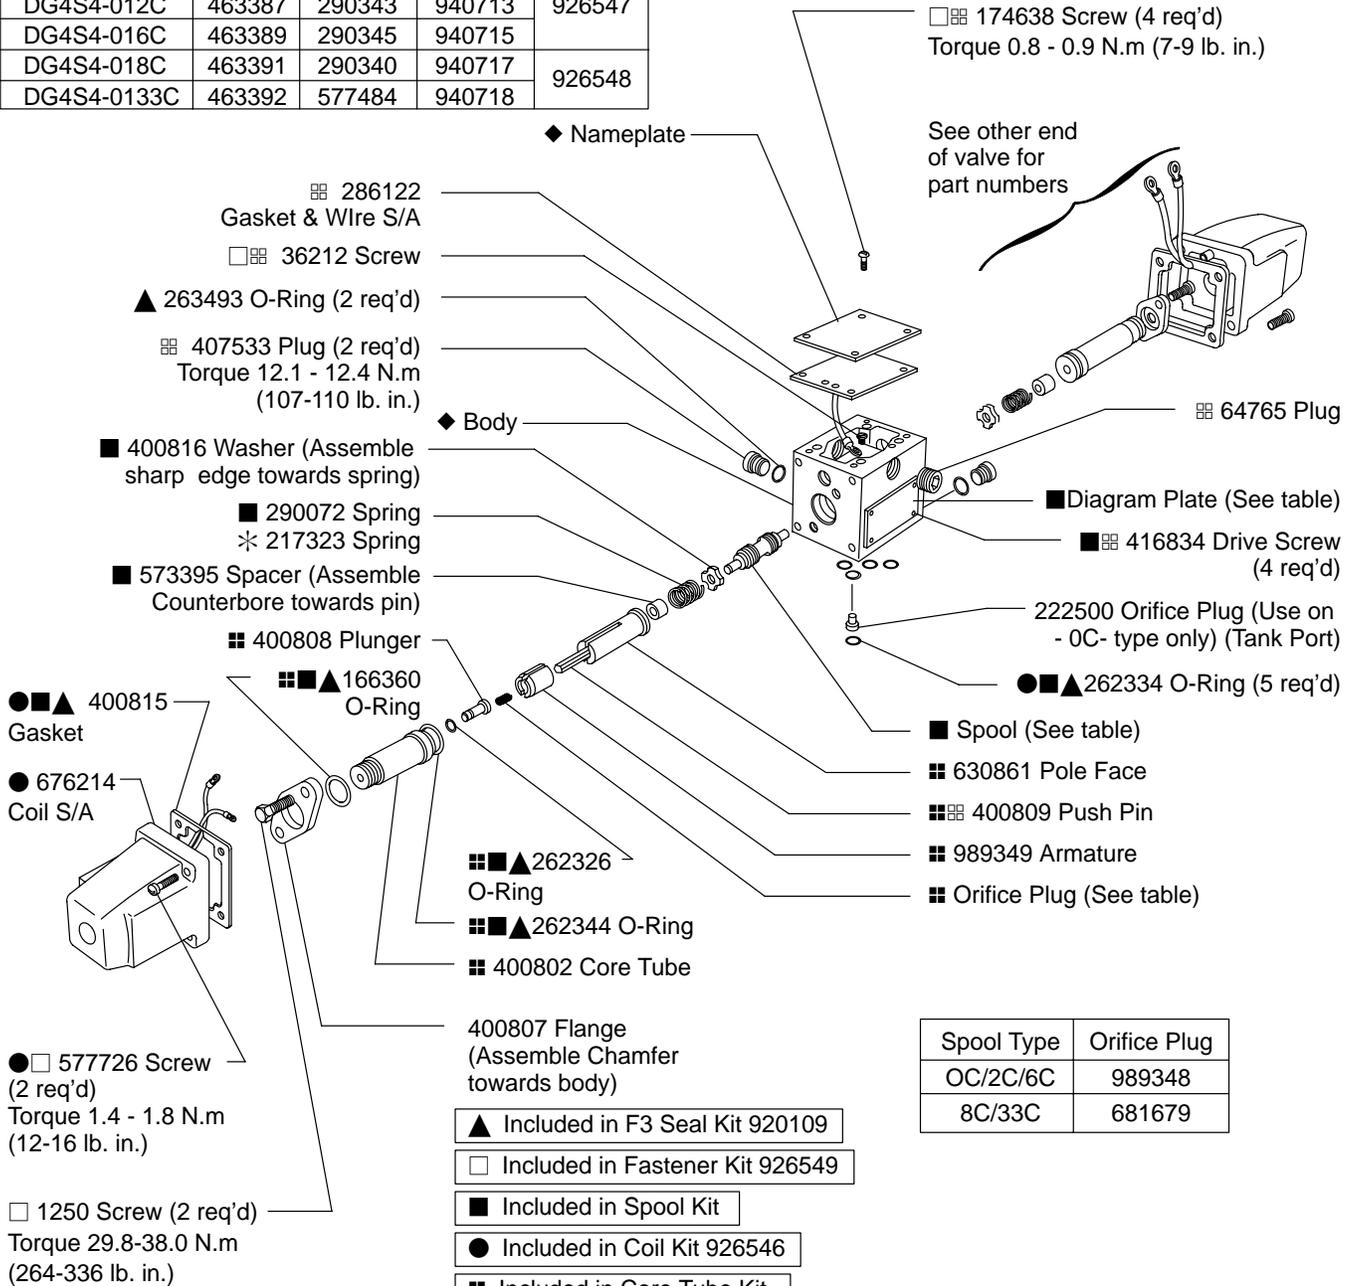

Spool Type	Orifice Plug
OC/2C/6C	989348
8C/33C	681679

- ▲ Included in F3 Seal Kit 920109
- Included in Fastener Kit 926549
- Included in Spool Kit
- Included in Coil Kit 926546
- Included in Core Tube Kit
- ◆ Not Available for Sale
- Available only in Kits of 25 each
- * Use on -018C Models only

Model Code

(F3) - DG4S 4 * - 01 * C - W3 - BB - 50 - S410

┌───┐
┌───┐
┌──┐┌──┐
┌──┐┌──┐┌──┐
┌──┐
┌──┐
┌──┐
┌──┐

└──┘
└──┘
└──┘└──┘
└──┘└──┘└──┘
└──┘
└──┘
└──┘
└──┘

1
2
3 4
5 6 7
8
9
10
11

1 Seal Material

F3 - Seals for mineral oil and fire resistant fluids

2 Model Series

DG4S4 - Directional valve, manifold or subplate mounted, solenoid operated, sliding spool

3 Flow Direction

4 - 4 way

4 Solenoid Indicator Lights

L - Light
(Omitted - None)

5 Series (NFPA-D02 Interface)

6 Spool Type

7 Spring Centered

8 Wet Armature Type Solenoid

W3 - Serviceable Core Tube S/A


9 Special Solenoid

(115 VAC 60 Hz)

10 Design Number

11 Smooth Shift

For Models with Solenoid Indicator Lights

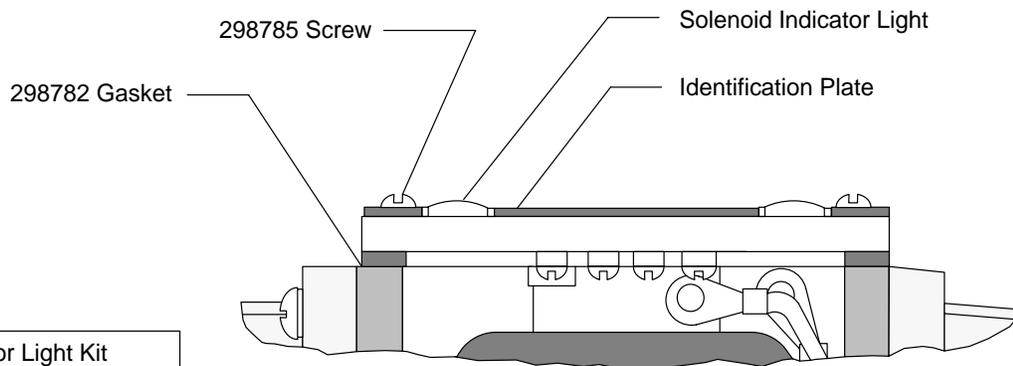

Solenoid Indicator Light Kit (Includes all parts identified)	
Voltage Range	Kit
100 thru 127	941615

NOTE

Refer to Parts Drawing I-3487-S for models with plug-in feature.

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Eaton OFP, OFR and OFRS filter series are recommended.

Printed in U.S.A.